



SILICON DESIGNS INC.

• Compatible with Silicon Designs accelerometers

- No additional accelerometer power supply needed
- Automatic and manual calibration routine
- +/-1G Flip or manually enter from calibration certificate
 Adjustable filters and FFT for data analysis in both real time or post collection
- Three input channels support three 1- axis modules or one 3- axis module
- 16 Bit sample rates from 1 to 10,000 samples/second per axis
- Recording feature with playback in multiple speeds
- Available preconfigured if purchased with a new Silicon Designs accelerometer module
- Automatic setup in less than 5 minutes includes bias, scale factor, etc.
- Last configuration stored in memory and available remotely
- Included software features familiar and convenient user interface built using a LabView platform

MODEL 3330 G-LOGGER DATA ACQUISITION SYSTEM





SPECIFICATIONS

<u>PHYSICAL</u> Case Size Weight Case Material

5.5" x 4.25" x 1.5" 275 grams / 9.5 oz. Die Cast Aluminum, Plastic

ENVIRONMENTAL Operating Temperature Storage Temperature Humidity

OPERATIONAL

Connection USB Connection Memory Type Max SD Card Size 25 Pin Female D-SubOperating SystemMicro USB (B)Host ConnectingSD Card, Micro SD w/ AdaptorPower Supply32 GBMax Power Construction

PC REQUIREMENTS

Operating Systems Host Connection Power Supply Max Power Consumption TCP/IP Remote Operation 0°C to +55°C (max) -40°C to +85°C (max) 0% - 90% Non-condensing

Windows 10, 8, 7, XP USB2 Type A Via USB Cable 750 mW Network Connection Req.

ZERO (DC) TO MEDIUM FREQUENCY APPLICATIONS



- Real time data monitoring
- Collect data in G or volts
- Display shows from 100ms to 2 minutes of data
- FFT (Fast Fourier Transform) analysis is an advanced feature usually found on much more expensive DAQ systems
- Independent scale G/Div settings expand or shrink each channel's input for better visibility
- ADDITIONAL FEATURES
 - PAUSE, RWD, FWD without interrupting data
 - Optional offsets provide a staggered display for no overlap
 - Independent scale G/Div per channel
 - Oscilloscope (Sweep, Scope, Strip) and Volt Meter modes
 - Hide or show any or all of the 3 channels
 - View data from remote locations on network via TCP/IP
 - Optional offset setting per channel
 - Export time-stamped data to Excel, MatLab etc.


• collection

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE




DATA COLLECTION

Data can be collected live or recorded for playback later. Modifying the horizontal scale expands or contracts the period of time displayed on the screen from 100ms up to 2 minutes. Each axis is one channel, and these can be hidden or offset (but will still be recorded) as desired.

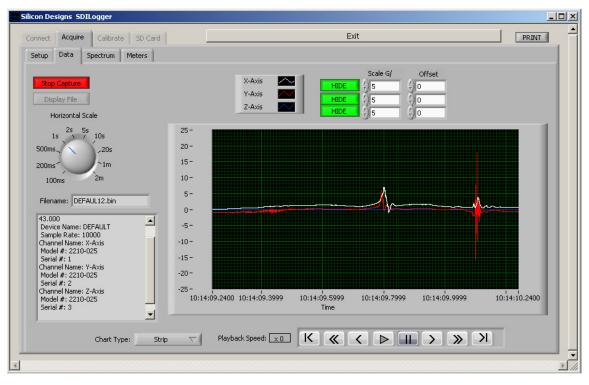

SPECTRUM (FFT)

SPECTRUM displays the FFT of the data. This is a more advanced feature of the G-logger 3330. You can analyze the data to see at which frequencies the maximum vibrations are occurring.

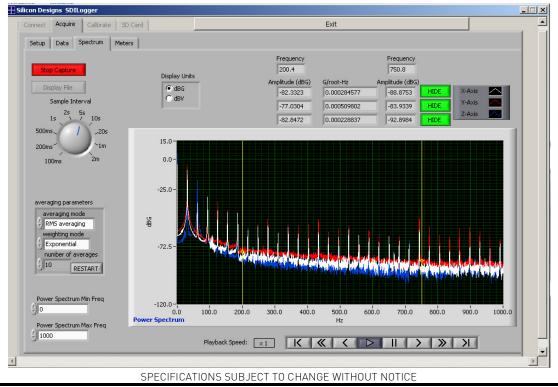


Silicon Designs, Inc. • 13905 NE 128th Street, Kirkland WA 98034 • Phone: 425-391-8329 • Fax: 425-391-0446




PEAK VALUES

The METERS screen provides DC, RMS, and peak values in either Volts or Gs. These values are calculated over the time interval selected by the horizontal scale selected on the Data tab. The values are updated at that same interval as well.

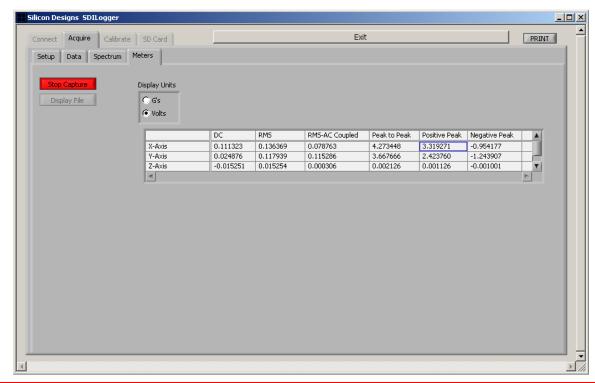

CALIBRATE

The default calibration parameters are supplied automatically, or unit-specific calibration parameters can be manually entered. Manual calibration can be done any time using gravity and performing a simple +/-1G flip.

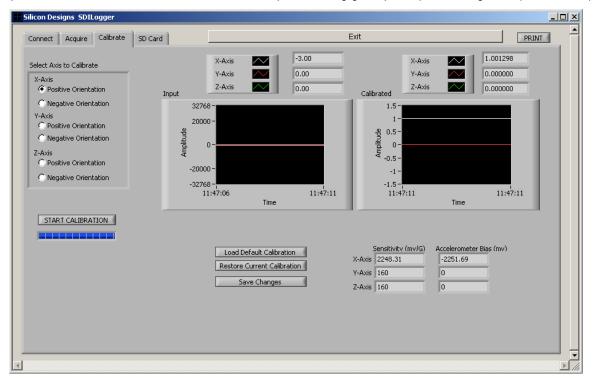

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Silicon Designs, Inc. • 13905 NE 128th Street, Kirkland WA 98034 • Phone: 425-391-8329 • Fax: 425-391-0446






III SDI

Model 3330 G-Logger

CONNECTOR PIN LAYOUT

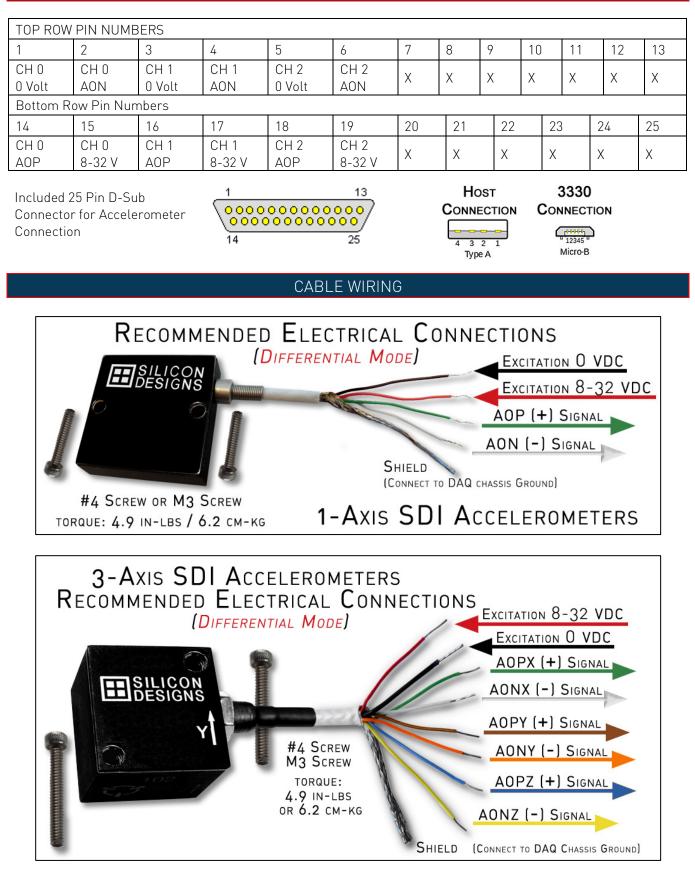

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Silicon Designs, Inc. • 13905 NE 128th Street, Kirkland WA 98034 • Phone: 425-391-8329 • Fax: 425-391-0446